



Unmanaged Ethernet switches
10/100 Mbps
Megabit POE

5 Port 10/100 Mbps Unmanaged switches POE

Feature

- Input Voltage: DC 12-58V
- Operating Temperature: -30°C ~ +70°C
- IP40 protection, fanless design
- Test Report: CCC, RoHS, FCC, CE
- Anti-static: 8KV-15KV
- MTBF: 100000 Hour

Description

This device is 5*10/100 Base-T Industrial Ethernet Switches POE. Through the fanless heat dissipation circuit design, wide range of working environment temperature, high protection level and other technologies, it provides excellent industrial quality with high/low temperature resistance and lightning protection, and enhances the reliability and safety of industrial networks. It can better meet the deployment requirements of rail transit, safe city, intelligent transportation, outdoor monitoring and other harsh environments



Order no. XPTN-9000-45-5TP

Provider Mode Ports

Fixed port	5*10/100 Base-T POE
Power interface	Phoenix terminal, redundant dual power supply
LED Indicators	P1/P2

Cable Type & Transmission Distance

Twisted-pair	0-100m (CAT5e,CAT6)
--------------	---------------------

Network Topology

Star topology	Support
Bus topology	Support
Tree topology	Support

Electrical Specifications

Input voltage	DC 12-58V
Power consumption	Support
Voltage Alarm	Support

Layer 2 Switching

Switching capacity	1 G
Packet forwarding rate	0.744 Mpps
MAC address table	2 K
Buffer	768 K
Forwarding delay	<5 us
MDX/MIDX	Support
Jumbo Frame	Support 2K Bytes
WatchDog	Support
Port Isolation	Support

Environment

Operating temperature	-30°C~+75°C
Storage temperature	-30°C~+75°C
Relative humidity	10 %~90% non-condensing
Thermal methods	Fanless, natural cooling
MTBF	100,000 hours

Mechanical Dimensions


Product size	31*91*118mm
Installation Method	DIN rail
Weight	0.4 KG

EMC & Ingress Protection

IP Level	IP40
Surge of Power	IEC 61000-4-5 Level (6KV/4KV)
Surge of Ethernet port	IEC 61000-4-5 Level (6KV/4KV)
RS	IEC 61000-4-3 Level 3
EFI	IEC 61000-4-4 Level 3
CS	IEC 61000-4-6 Level 3
PFMF	IEC 61000-4-8 Level 3
DIP	IEC 61000-4-11 Level 3
ESD	IEC 61000-4-2 Level 4
Free fall	0.5m

EMC & Ingress Protection

Authentication	ICCC, CE, FCC, RoHS
----------------	---------------------

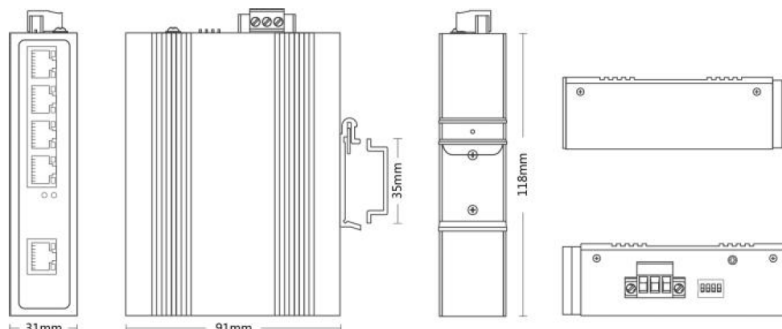



8 Port 10/100 Mbps Unmanaged switches POE

Feature

- Input Voltage: DC 12-58V
- Operating Temperature: -30°C ~ +70°C
- IP40 protection, fanless design
- Test Report: CCC, RoHS, FCC, CE
- Anti-static: 8KV-15KV
- MTBF: 100000 Hour

Description

This device is 8*10/100 Base-T Industrial Ethernet Switches POE. Through the fanless heat dissipation circuit design, wide range of working environment temperature, high protection level and other technologies, it provides excellent industrial quality with high/low temperature resistance and lightning protection, and enhances the reliability and safety of industrial networks. It can better meet the deployment requirements of rail transit, safe city, intelligent transportation, outdoor monitoring and other harsh environments



Order no. XPTN-9000-45-8TP

Provider Mode Ports

Fixed port	8*10/100 Base-T POE
Power interface	Phoenix terminal, redundant dual power supply
LED Indicators	P1/P2

Cable Type & Transmission Distance

Twisted-pair	0-100m (CAT5e,CAT6)
--------------	---------------------

Network Topology

Star topology	Support
Bus topology	Support
Tree topology	Support

Electrical Specifications

Input voltage	DC 12-58V
Power consumption	Support
Voltage Alarm	Support

Layer 2 Switching

Switching capacity	1.8 G
Packet forwarding rate	1.33 Mpps
MAC address table	2 K
Buffer	512 K
Forwarding delay	<4 us
MDX/MIDX	Support
Jumbo Frame	Support 2048 Bytes
WatchDog	Support
Port Isolation	Support

Environment

Operating temperature	-30°C~+75°C
Storage temperature	-30°C~+75°C
Relative humidity	10 %~90% non-condensing
Thermal methods	Fanless, natural cooling
MTBF	100,000 hours

Mechanical Dimensions


Product size	46X104X143mm
Installation Method	DIN rail
Weight	0.5 KG

EMC & Ingress Protection

IP Level	IP40
Surge of Power	IEC 61000-4-5 Level (6KV/4KV)
Surge of Ethernet port	IEC 61000-4-5 Level (6KV/4KV)
RS	IEC 61000-4-3 Level 3
EFI	IEC 61000-4-4 Level 3
CS	IEC 61000-4-6 Level 3
PFMF	IEC 61000-4-8 Level 3
DIP	IEC 61000-4-11 Level 3
ESD	IEC 61000-4-2 Level 4
Free fall	0.5m

EMC & Ingress Protection

Authentication	ICCC, CE, FCC, RoHS
----------------	---------------------

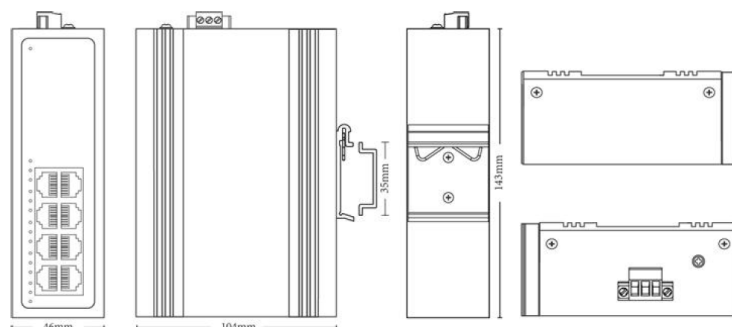

16 Port 10/100 Mbps Unmanaged switches POE

Feature

- Input Voltage: DC 12-58V
- Operating Temperature: -30°C ~ +70°C
- IP40 protection, fanless design
- Test Report: CCC, RoHS, FCC, CE
- Anti-static: 8KV-15KV
- MTBF: 100000 Hour

Description

This device is 16*10/100 Base-T Industrial Ethernet Switches POE. Through the fanless heat dissipation circuit design, wide range of working environment temperature, high protection level and other technologies, it provides excellent industrial quality with high/low temperature resistance and lightning protection, and enhances the reliability and safety of industrial networks. It can better meet the deployment requirements of rail transit, safe city, intelligent transportation, outdoor monitoring and other harsh environments



Order no. XPTN-9000-65-2GX16TP

Provider Mode Ports

Fixed port	16*10/100 Base-T POE
Power interface	Phoenix terminal, redundant dual power supply
LED Indicators	P1/P2

Cable Type & Transmission Distance

Twisted-pair	0-100m (CAT5e,CAT6)
--------------	---------------------

Network Topology

Star topology	Support
Bus topology	Support
Tree topology	Support

Electrical Specifications

Input voltage	DC 12-58V
Power consumption	Support
Voltage Alarm	Support

Layer 2 Switching

Switching capacity	68 G
Packet forwarding rate	50.59 Mpps
MAC address table	16 K
Buffer	12M
Forwarding delay	<10 us
MDX/MIDX	Support
Jumbo Frame	Support 10K Bytes
WatchDog	Support
Port Isolation	Support

Environment

Operating temperature	-30°C~+75°C
Storage temperature	-30°C~+75°C
Relative humidity	10 %~90% non-condensing
Thermal methods	Fanless, natural cooling
MTBF	100,000 hours

Mechanical Dimensions


Product size	94*104*143mm
Installation Method	DIN rail
Weight	1.0 KG

EMC & Ingress Protection

IP Level	IP40
Surge of Power	IEC 61000-4-5 Level (6KV/4KV)
Surge of Ethernet port	IEC 61000-4-5 Level (6KV/4KV)
RS	IEC 61000-4-3 Level 3
EFI	IEC 61000-4-4 Level 3
CS	IEC 61000-4-6 Level 3
PFMF	IEC 61000-4-8 Level 3
DIP	IEC 61000-4-11 Level 3
ESD	IEC 61000-4-2 Level 4
Free fall	0.5m

EMC & Ingress Protection

Authentication	ICCC, CE, FCC, RoHS
----------------	---------------------

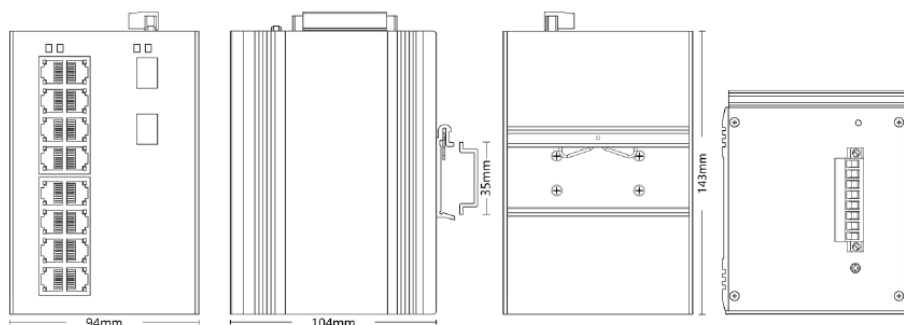



Unmanaged Ethernet switches
10/100/1000 Mbps
Gigabit POE

5 Port 100/1000 Mbps Unmanaged switches POE

Feature

- Input Voltage: DC 12-58V
- Operating Temperature: -30°C ~ +70°C
- IP40 protection, fanless design
- Test Report: CCC, RoHS, FCC, CE
- Anti-static: 8KV-15KV
- MTBF: 100000 Hour

Description

This device is 5*100/1000 Base-T Industrial Ethernet Switches POE. Through the fanless heat dissipation circuit design, wide range of working environment temperature, high protection level and other technologies, it provides excellent industrial quality with high/low temperature resistance and lightning protection, and enhances the reliability and safety of industrial networks. It can better meet the deployment requirements of rail transit, safe city, intelligent transportation, outdoor monitoring and other harsh environments



Order no. XPTN-9000-45-5GP

Provider Mode Ports

Fixed port	5*100/1000 Base-T POE
Power interface	Phoenix terminal, redundant dual power supply
LED Indicators	P1/P2

Cable Type & Transmission Distance

Twisted-pair	0-100m (CAT5e,CAT6)
--------------	---------------------

Network Topology

Star topology	Support
Bus topology	Support
Tree topology	Support

Electrical Specifications

Input voltage	DC 12-58V
Power consumption	Support
Voltage Alarm	Support

Layer 2 Switching

Switching capacity	14 G
Packet forwarding rate	10.416 Mpps
MAC address table	8 K
Buffer	1M
Forwarding delay	<5 us
MDX/MIDX	Support
Jumbo Frame	Support 10K Bytes
WatchDog	Support
Port Isolation	Support

Environment

Operating temperature	-30°C~+75°C
Storage temperature	-30°C~+75°C
Relative humidity	10 %~90% non-condensing
Thermal methods	Fanless, natural cooling
MTBF	100,000 hours

Mechanical Dimensions


Product size	31*91*118mm
Installation Method	DIN rail
Weight	0.4 KG

EMC & Ingress Protection

IP Level	IP40
Surge of Power	IEC 61000-4-5 Level (6KV/4KV)
Surge of Ethernet port	IEC 61000-4-5 Level (6KV/4KV)
RS	IEC 61000-4-3 Level 3
EFI	IEC 61000-4-4 Level 3
CS	IEC 61000-4-6 Level 3
PFMF	IEC 61000-4-8 Level 3
DIP	IEC 61000-4-11 Level 3
ESD	IEC 61000-4-2 Level 4
Free fall	0.5m

EMC & Ingress Protection

Authentication	ICCC, CE, FCC, RoHS
----------------	---------------------

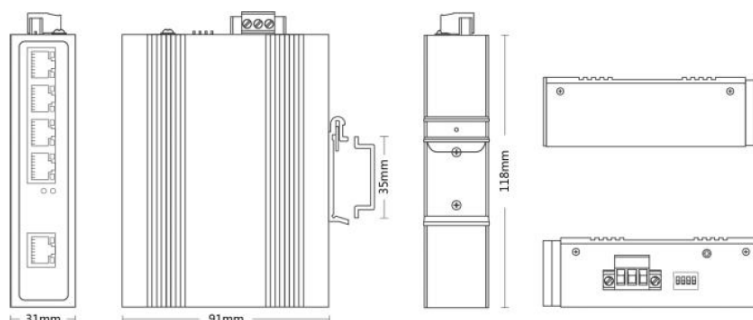



8 Port 100/1000 Mbps Unmanaged switches POE

Feature

- Input Voltage: DC 12-58V
- Operating Temperature: -30°C ~ +70°C
- IP40 protection, fanless design
- Test Report: CCC, RoHS, FCC, CE
- Anti-static: 8KV-15KV
- MTBF: 100000 Hour

Description

This device is 8*100/1000 Base-T Industrial Ethernet Switches POE. Through the fanless heat dissipation circuit design, wide range of working environment temperature, high protection level and other technologies, it provides excellent industrial quality with high/low temperature resistance and lightning protection, and enhances the reliability and safety of industrial networks. It can better meet the deployment requirements of rail transit, safe city, intelligent transportation, outdoor monitoring and other harsh environments



Order no. XPTN-9000-45-8GP

Provider Mode Ports

Fixed port	8*100/1000 Base-T POE
Power interface	Phoenix terminal, redundant dual power supply
LED Indicators	P1/P2

Cable Type & Transmission Distance

Twisted-pair	0-100m (CAT5e,CAT6)
--------------	---------------------

Network Topology

Star topology	Support
Bus topology	Support
Tree topology	Support

Electrical Specifications

Input voltage	DC 12-58V
Power consumption	Support
Voltage Alarm	Support

Layer 2 Switching

Switching capacity	20 G
Packet forwarding rate	14.88 Mpps
MAC address table	16 K
Buffer	2M
Forwarding delay	<5 us
MDX/MIDX	Support
Jumbo Frame	Support 10K Bytes
WatchDog	Support
Port Isolation	Support

Environment

Operating temperature	-30°C~+75°C
Storage temperature	-30°C~+75°C
Relative humidity	10 %~90% non-condensing
Thermal methods	Fanless, natural cooling
MTBF	100,000 hours

Mechanical Dimensions


Product size	143X104X48mm
Installation Method	DIN rail
Weight	0.5 KG

EMC & Ingress Protection

IP Level	IP40
Surge of Power	IEC 61000-4-5 Level (6KV/4KV)
Surge of Ethernet port	IEC 61000-4-5 Level (6KV/4KV)
RS	IEC 61000-4-3 Level 3
EFI	IEC 61000-4-4 Level 3
CS	IEC 61000-4-6 Level 3
PFMF	IEC 61000-4-8 Level 3
DIP	IEC 61000-4-11 Level 3
ESD	IEC 61000-4-2 Level 4
Free fall	0.5m

EMC & Ingress Protection

Authentication	ICCC, CE, FCC, RoHS
----------------	---------------------

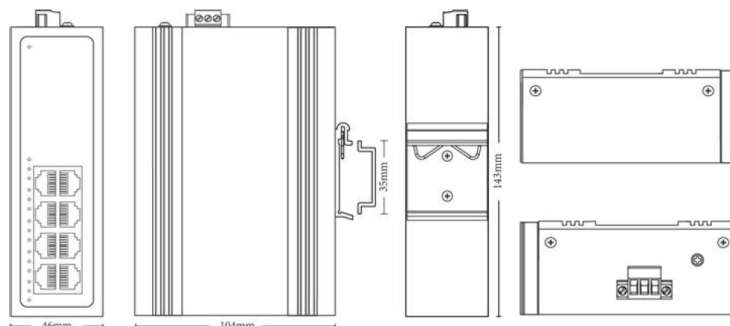

16 Port 100/1000 Mbps Unmanaged switches POE

Feature

- Input Voltage: DC 12-58V
- Operating Temperature: -30°C ~ +70°C
- IP40 protection, fanless design
- Test Report: CCC, RoHS, FCC, CE
- Anti-static: 8KV-15KV
- MTBF: 100000 Hour

Description

This device is 16*100/1000 Base-T Industrial Ethernet Switches POE. Through the fanless heat dissipation circuit design, wide range of working environment temperature, high protection level and other technologies, it provides excellent industrial quality with high/low temperature resistance and lightning protection, and enhances the reliability and safety of industrial networks. It can better meet the deployment requirements of rail transit, safe city, intelligent transportation, outdoor monitoring and other harsh environments



Order no. XPTN-9000-65-2GX16GP

Provider Mode Ports

Fixed port	16*100/1000 Base-T POE
Power interface	Phoenix terminal, redundant dual power supply
LED Indicators	P1/P2

Cable Type & Transmission Distance

Twisted-pair	0-100m (CAT5e,CAT6)
--------------	---------------------

Network Topology

Star topology	Support
Bus topology	Support
Tree topology	Support

Electrical Specifications

Input voltage	DC 12-58V
Power consumption	Support
Voltage Alarm	Support

Layer 2 Switching

Switching capacity	68 G
Packet forwarding rate	50.59 Mpps
MAC address table	16 K
Buffer	12M
Forwarding delay	<10 us
MDX/MIDX	Support
Jumbo Frame	Support 10K Bytes
WatchDog	Support
Port Isolation	Support

Environment

Operating temperature	-30°C~+75°C
Storage temperature	-30°C~+75°C
Relative humidity	10 %~90% non-condensing
Thermal methods	Fanless, natural cooling
MTBF	100,000 hours

Mechanical Dimensions


Product size	94*104*143mm
Installation Method	DIN rail
Weight	1.0 KG

EMC & Ingress Protection

IP Level	IP40
Surge of Power	IEC 61000-4-5 Level (6KV/4KV)
Surge of Ethernet port	IEC 61000-4-5 Level (6KV/4KV)
RS	IEC 61000-4-3 Level 3
EFI	IEC 61000-4-4 Level 3
CS	IEC 61000-4-6 Level 3
PFMF	IEC 61000-4-8 Level 3
DIP	IEC 61000-4-11 Level 3
ESD	IEC 61000-4-2 Level 4
Free fall	0.5m

EMC & Ingress Protection

Authentication	ICCC, CE, FCC, RoHS
----------------	---------------------

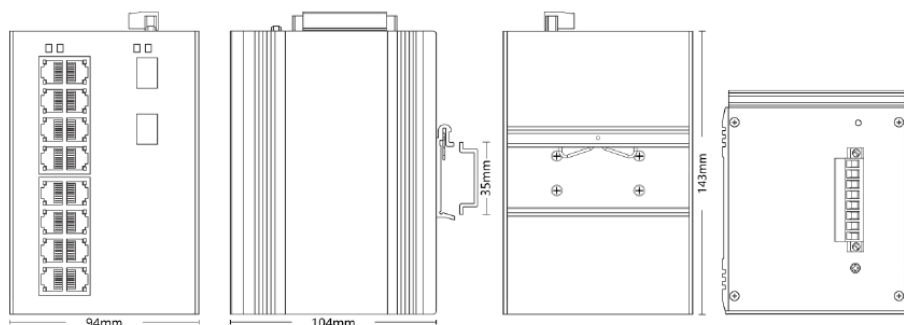



www.pe-thai.com